

Pressure Switch Modular Valve

**13.2 gpm
3625 psi**

Features

This modular valve detects pressure changes inside the hydraulic circuit and opens and closes an electrical circuit accordingly.

High precision detection, high precision circuit control, outstanding reliability. Maximum operating pressure: 3625 psi Indicator light built into the DIN connector shows operational status at

a glance. A double type is also available for control of both port A and port B in a compact configuration.

Specifications

Model No.	Nominal Diameter (Size)	Maximum Working Pressure psi	Maximum Flow Rate gpm	Pressure Adjustment Range psi	Weight lbs	Gasket Surface Dimensions
OW-G01-PC-R**-30 P1 P3	1/8	3625	13.2	72 to 500 116 to 1000 500 to 3045	3.9	ISO 4401-03-02-0-94
OW-G01-AC-R**-30 A1 A3				72 to 500 116 to 1000 500 to 3045	3.9	
OW-G01-BC-R**-30 B1 B3				72 to 500 116 to 1000 500 to 3045	3.9	
OW-G01-WC-R**-30 W1 W3				72 to 500 116 to 1000 500 to 3045	5.7	

Electrical Specifications Micro Switch Manufacturer: Omron Model No. SS-5	Contact Capacitance (Resistive Load)		AC	125V	5A
				250V	3A
			DC	12V	2.2A
				24V	1.1A
	Mechanical Life		At least 1 × 10 ⁷		
	Electrical Life		At least 3 × 10 ⁶ (AC,0.1A,cos φ=1)		
	Contact Resistance		30MΩ maximum (initial value)		
	Insulation Resistance		At least 100MΩ		
Allowable Operating Frequency		60 times/minute (electrical)			
Operating Environment	Dust Resistance/Water Resistance Rank		JIS C0920 IP64		
	Ambient Temperature		-4° F to 158° F (non-condensation)		
	Operating Fluid	Fluid Temperature	-4° F to 158°		Use a fluid that is within both ranges.
		Allowable Viscosity Range	15 to 300		
		Filtration	10μm maximum		






- Handling
- 1 See the detailed explanation on the next page for information about wiring inside connectors.
 - 2 Contacts are normally open type only, not normally closed type.
 - 3 In addition to load wiring, power supply wiring is also required to illuminate the indicator light. See the wiring diagram for more information.
 - 4 If the DIN connector interferes with other valves, remove the two switch installation bolts and change the installation orientation. If interference is caused in all orientations, install an interference blanker plate on top of the connector. Contact your agent if an interference blanker plate is required.
 - 5 Note that a special type of DIN connector is required. The DIN connector is not interchangeable with the one for the SA type solenoid valve.
 - 6 If you cannot remove the DIN connector when wiring, remove the switch installation bolts and then remove the DIN connector. The tightening torque for the installation bolts is 3.6 to 5.1 ft lbs.

Understanding Model Numbers

OW - G 01 - P 1 - (K)R - D2 - 30

- Design number
- Power supply specification
C115: 115V; C2: 230V
D1: 12V; D2: 24V
- R: With indicator light (standard)
K: With manual handle (optional)
- Pressure adjustment range C: 72 to 500 psi; 1: 116 to 1000 psi; 3: 500 to 3045 psi
- Control port P: P port; A: A port; B: B port; W: A, B ports
- Nominal diameter (size) 01
- Mounting method G: Gasket type
- Pressure switch modular valve


Connectors

Model No.	Power supply specification	Wiring	Electrical Circuit Diagram
BRC41-01WD2	D2	⊙When signal input device (load) remote common is plus OW Terminal 1 is connected to load, while Terminals 2 and 3 are connected to power (Terminal 2 to +). 	Normal open type with indicator  Pressure increase causes indicator to light. Circuit closed (ON) Pressure decrease causes indicator to go out. Circuit open (OFF)
		⊙When signal input device (load) common is minus OW Terminal 1 is connected to load, while Terminals 2 and 3 are connected to power (Terminal 2 to -). 	
BRC41-01WC2	C2	⊙When signal input device (load) is AC OW Terminal 1 is connected to load, while Terminals 2 and 3 are connected to power (Terminal 2 is nonpolar). 	Normal open type with indicator  Pressure increase causes indicator to light. Circuit closed (ON) Pressure decrease causes indicator to go out. Circuit open (OFF)


Note: 1. The DIN connector wiring connector port size is PG11.
 2. The compatible cable diameter for the DIN connector is $\phi 8$ to $\phi 10$. Dust resistance and water resistance is lost for any cable outside this range.
 3. The connector can be installed in different orientations are 90-degree increments by changing the orientation of the terminal block.
 4. The connector is designed so the cover cannot be removed unless the installation screws are removed.
 5. Use M3 for round type and Y type solderless terminals.
 6. The tightening torque of M3 screws used for securing connectors and for terminals is 42 to 70 in lbs.

Installation Dimension Drawings


OW-G01-^P_A*-R*-2-30

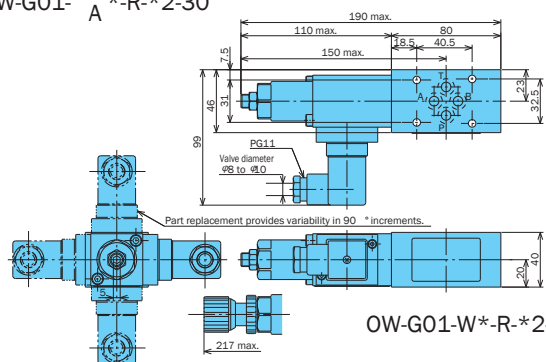

OW-G01-W*-R*-2-30

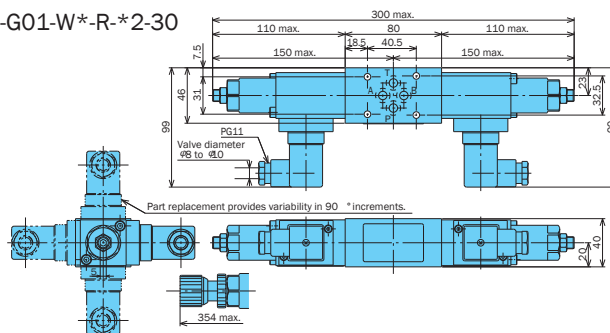

OW-G01-B*-R*-2-30

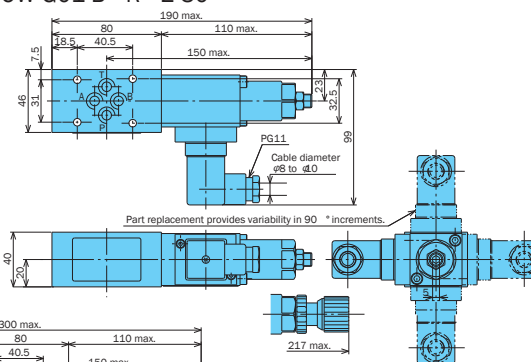


Note: Pressure is increased by clockwise (rightward) rotation of the adjusting screw, and decreased by counterclockwise (leftward) rotation.

Performance Curves

Hydraulic Operating Fluid Viscosity 32 centistokes


Pressure Loss Characteristics

OW-G01-**-R-**-30

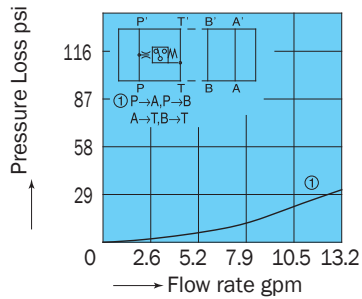


Setting Pressure - Differential Characteristics

OW-G01-^C₁-R-**-30

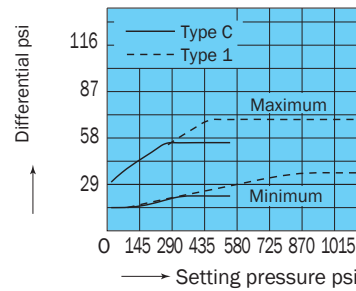


OW-G01-3-R-**-30

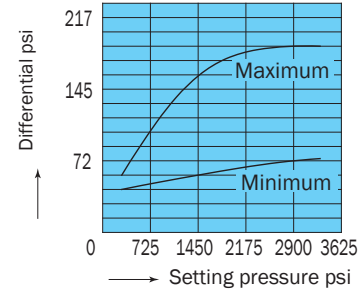


Drain Rate Characteristics

OW-G01-**-R-**-30

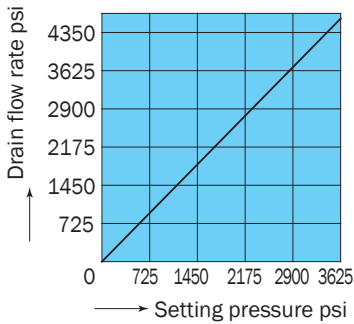


Number of Adjusting Screw Rotations Pressure Characteristics

OW-G01-**-R-**-30



Cross-sectional Drawing

OW-G01-P*-R-2-30

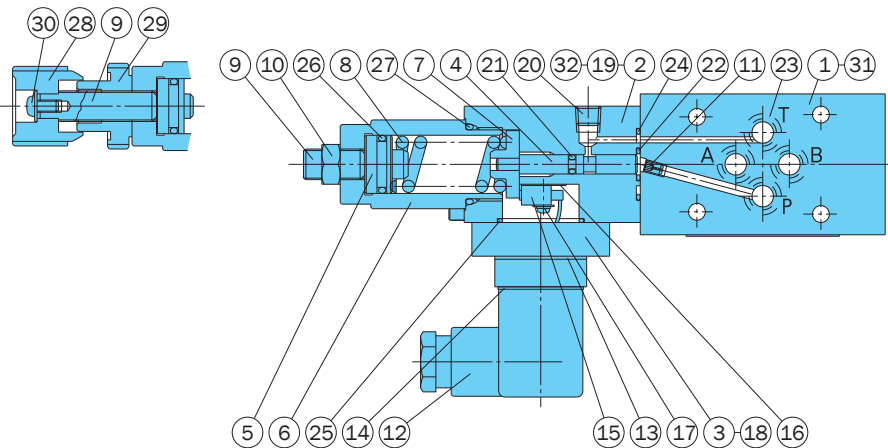

Part No.	Part Name	Part No.	Part Name
1	Body	17	Screw
2	Cover	18	Screw
3	Cover	19	Screw
4	Piston	20	Plug
5	Push rod	21	O-ring
6	Retainer	22	O-ring
7	Guide	23	O-ring
8	Spring	24	O-ring
9	Screw	25	O-ring
10	Nut	26	O-ring
11	Choke	27	O-ring
12	Connector	28	Knob
13	Gasket	29	Nut
14	Gasket	30	Screw
15	Micro switch assy	31	Plate
16	Separator	32	Plate

Seal Part List (Kit Model Number BRCS-01W*)

Part No.	Part Name	Part Number	Q'ty			
			P	W	A	B
21	O-ring	1A-P3	1	2	1	1
22	O-ring	AS568-011(Hs90)	1	2	1	1
23	O-ring	1B-P9	4	4	4	4
24	O-ring	AS568-019(Hs70)	1	2	1	1
25	O-ring	AS568-022(Hs70)	1	2	1	1
26	O-ring	1A-P15	1	2	1	1
27	O-ring	1B-P22	1	2	1	1

Note: Specify P, W, A, or B for the asterisk (*) in the kit model number.